


Novaform Acoustic Panel Specifications - 12mm

Composition	100% Polyester (60% recycled polyester fiber+ 40% virgin polyester fiber)
Formaldehyde Emissions	0.00ug/g
Acoustic Rating	0.45-0.90 NRC
Panel Size / Thickness	2800mm x 1225mm x 12mm
Surface Finish	Matte
Weight	0.5 lb / sqft
Colors	28 standard colors (24 colors + 4 woodgrain)
Application	Indoors only
Fabrication	Utility knife or CNC with oscillating knife Adhere to substrate with Silicon based construction adhesive.
Installation	Recommended adhesive: Roman Pro-555 Attach with screws, Z-clips, nails, stand-offs, aluminum trim or millwork.
Fire Rating	ASTM E 84 – Class A
Care Instructions	Vacuum to remove dust Remove spills immediately using a clean damp cloth, clear dish soap, and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first.

NRC Comparison

Frequency / Hz	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	1 in	NRC
0mm	0.03	0.01	0.09	0.04	0.05	0.09	0.12	0.25	0.32	0.49	0.61	0.72	0.82	0.85	0.91	0.94	0.95	0.44	0.45
50mm	0.20	0.16	0.22	0.32	0.46	0.56	0.63	0.80	0.89	1.03	1.04	0.99	1.07	1.00	0.93	0.87	0.92	0.81	0.80
150mm	0.29	0.46	0.44	0.57	0.68	0.81	0.97	0.96	0.91	1.04	0.92	0.80	0.94	0.94	0.91	0.90	0.91	0.97	0.90

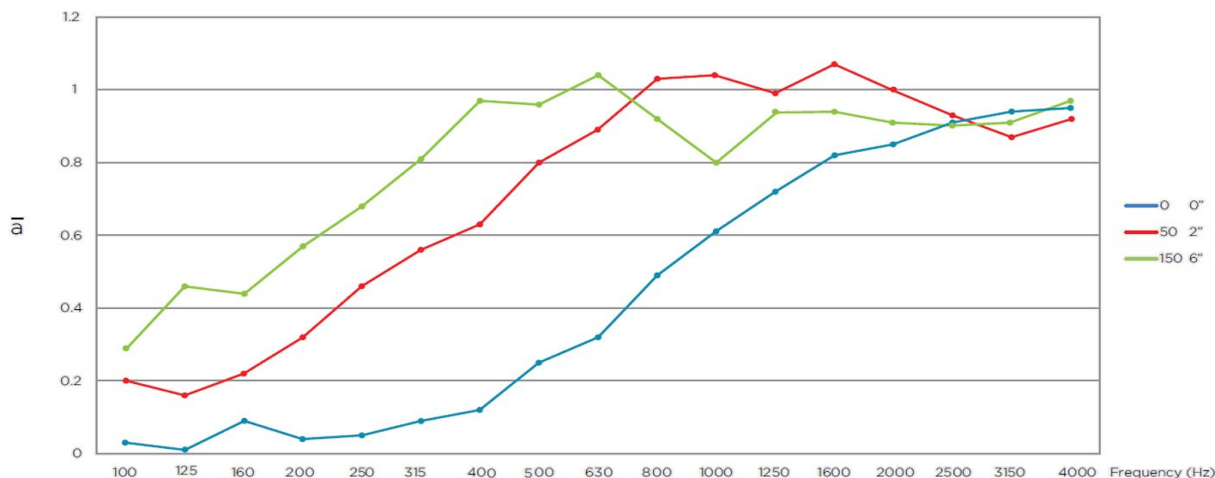


Novaform Acoustic Panel Specifications - 25mm

Composition	100% Polyester (60% recycled polyester fiber+ 40% virgin polyester fiber)
Formaldehyde Emissions	0.00ug/g
Acoustic Rating	0.75-0.90 NRC
Panel Size / Thickness	2800mm x 1225mm x 24mm
Surface Finish	Matte
Weight	1 lb / sqft
Colors	5 standard colors. Any 12mm color can be laminated to make 25mm sheets.
Application	Indoors only
Fabrication	Utility knife or CNC with oscillating knife
Installation	Adhere to substrate with Silicon based construction adhesive Attach with screws, Z-clips, nails, stand-offs, aluminum trim or millwork.
Fire Rating	ASTM E 84 – Class A
Care Instructions	Vacuum to remove dust Remove spills immediately using a clean damp cloth, clear dish soap, and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first.

NRC Comparison

Frequency / Hz	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	NRC
0mm	0.14	0.01	0.04	0.13	0.19	0.28	0.39	0.52	0.78	0.85	0.94	0.96	1.04	1.03	1.01	0.98	0.96	0.97	0.75
50mm	0.37	0.25	0.36	0.42	0.61	0.77	0.77	0.92	0.98	1.04	1.09	1.00	0.97	0.97	0.96	0.93	1.00	0.99	0.95
150mm	0.39	0.45	0.55	0.64	0.66	0.69	0.77	0.88	0.99	0.90	0.92	0.86	0.90	0.97	1.00	0.97	0.99	1.00	0.90

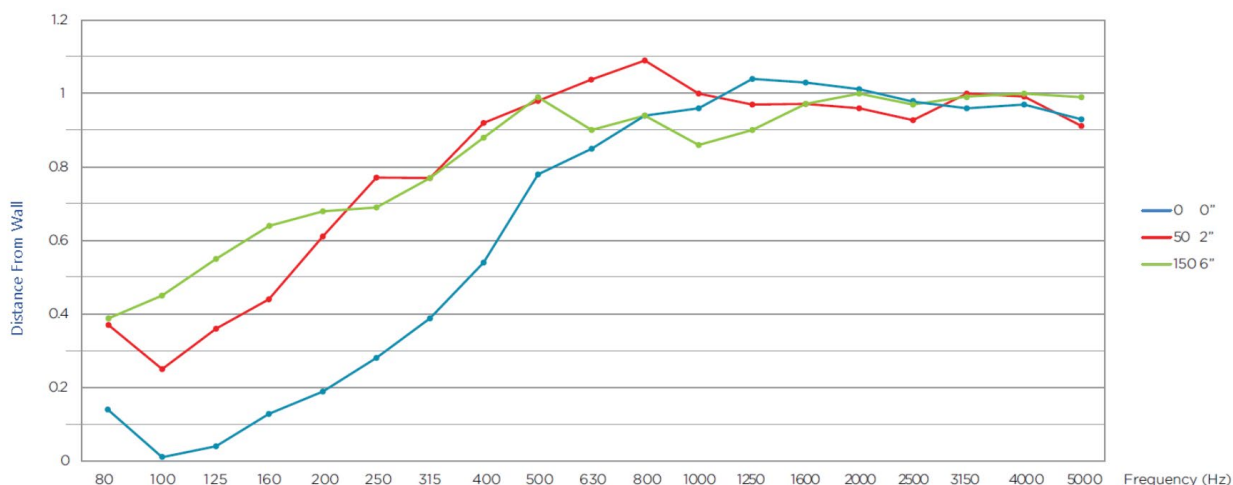

Novaform Acoustic Panel Specifications - 6mm

Composition	100% Polyester (60% recycled polyester fiber+ 40% virgin polyester fiber)
Formaldehyde Emissions	0.00ug/g
Acoustic Rating	0.20-0.75 NRC
Panel Size / Thickness	3048mm x 1225mm x 6mm
Surface Finish	Matte
Weight	0.25 lb / sqft
Colors	7 standard colors
Application	Indoors only
Fabrication	Utility knife or CNC with oscillating knife
Installation	Adhere to substrate with Silicon based construction adhesive Attach with screws, Z-clips, nails, stand-offs, aluminum trim or millwork.
Fire Rating	ASTM E 84 – Class A
Care Instructions	Vacuum to remove dust Remove spills immediately using a clean damp cloth, clear dish soap, and water. Carpet and fabric cleaners can be used – always test an inconspicuous area first.

NRC Comparison

Frequency / Hz	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	$\bar{\alpha}$	NRC
0mm	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.06	0.11	0.16	0.23	0.34	0.43	0.52	0.60	0.64	0.74	0.20	0.20
6mm	0.00	0.00	0.33	0.00	0.04	0.05	0.10	0.22	0.23	0.21	0.30	0.36	0.41	0.41	0.50	0.59	0.48	0.24	0.25
25mm	0.12	0.03	0.21	0.15	0.02	0.07	0.10	0.19	0.23	0.35	0.46	0.58	0.73	0.87	0.93	0.95	0.96	0.39	0.40
50mm	0.00	0.00	0.00	0.11	0.10	0.12	0.21	0.33	0.45	0.57	0.73	0.84	0.95	0.97	0.96	0.86	0.80	0.53	0.55
150mm	0.32	0.18	0.12	0.50	0.48	0.58	0.65	0.83	0.86	0.91	0.81	0.63	0.73	0.88	0.81	0.97	0.99	0.72	0.75

